




Jinan LBR Bearing Co., Ltd.

SKF BEAM 025075-2RS/PE thrust ball bearings

Bearing No. BEAM 025075-2RS/PE

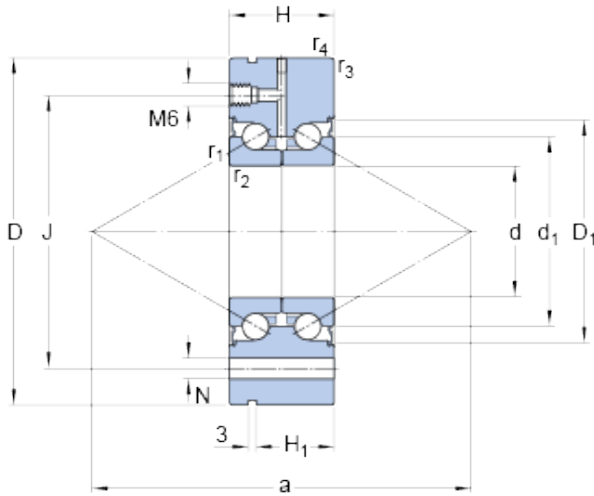

BEAM 025075-2RS/PE Bearing 2D drawings and 3D CAD models

Size	25x75x28 mm
Bore Diameter	25 mm
Outer Diameter	75 mm
Width	28 mm
d	25 mm
D	75 mm
H	28 mm
d ₁	40.5 mm
D ₁	49 mm
H ₁	19 mm
r _{1,2} - min.	0.3 mm
r _{3,4} - min.	0.8 mm
a	84 mm
J	58 mm
H	6.8 mm
d _a - min.	32 mm
D _a - max.	49 mm
r _a - max.	0.6 mm
Basic dynamic load rating - C	27.6 kN
Basic static load rating - C ₀	55 kN
Fatigue load limit - P _u	2 kN
Limiting speed	3400 r/min
Preload	1920 N
Frictional moment	0.4 N · m
Static Axial rigidity	770 N/micron



Jinan LBR Bearing Co., Ltd.

Mass bearing	0.72 kg
Required attachment bolt size	M6
Category	Precision Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	7316572024157
Product Group	B04270
Enclosure	2 Seals
Precision Class	ABEC 5 ISO P5
Material - Ball	Steel
Number of Bearings	1 (Single)
Contact Angle	60 Degree
Raceway Style	Not Applicable
Cage Material	Polyamide
Rolling Element	Ball Bearing
Enclosure Type	Contact Seal
Flush Ground	No
Inch - Metric	Metric
Other Features	Double Row Angular Contact Thrust Bearing Double Direction
Long Description	25MM Bore; 75MM Outside Diameter; 28MM Width; 2 Seals Enclosure; ABEC 5 ISO P5 Precision; Steel Ball Material; 1 (Single) Bearing; 60 Degree Contact Angle; Polyamide Cage Material; Ball Bearing
Category	Precision Ball Bearings
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28



Jinan LBR Bearing Co., Ltd.

Noun	Bearing
Keyword String	Ball Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	BEAM 025075-2RS/PE
Weight / LBS	0.062
Width	1.102 Inch 28 Millimeter
Bore	0.984 Inch 25 Millimeter
Outside Diameter	2.953 Inch 75 Millimeter